



**THE MOST FLEXIBLE STORAGE SOLUTION**

FIRE RESERVE

DRINKING WATER


RAINWATER

WASTEWATER

FUELS


LIQUID FERTILIZERS

CUSTOM DESIGN

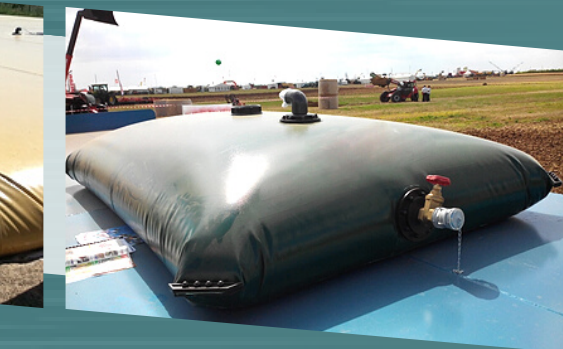

## Tank fittings can be altered and/or added as you require

No.1	Welded polypropylene vent DN 146
No.2	Bolted flange overflow DN 50. Elbow, threaded both ends
No.3	Side entry, polypropylene bolted flange pin, with integrated anti-vortex. Brass gate valve - threaded 4". Symmetric threaded coupling DN 100 with lock.
No.4	Reinforced bolted polypropylene corner mouldings.

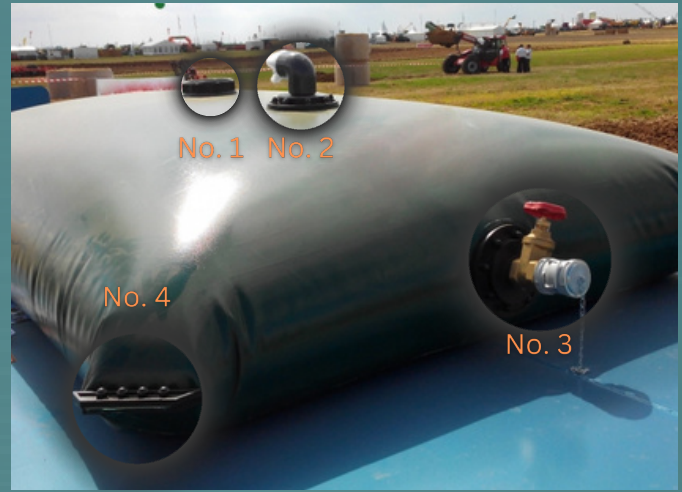

## TECHNICAL FEATURES

Surface weight	900 gr/m <sup>2</sup>	1100gr/m <sup>2</sup>	1300gr/m <sup>2</sup>
Coating	Tanks are made using a highly resistant polyester textile, coated with several layers of PVC.		
Treatment	Double-sided anti-UV		
Warp-weft tear resistance	550/550 N	600/500 N	600/600 N
Warp-weft split resistance	4000/4000 daN/50cm	4000/4000 daN/50cm	4200/4200 daN/50cm
Support	100% PES high tenacity continuous filament 1.100 dtex		



## DIMENSIONS

VOLUME IN M <sup>3</sup>	LENGTH	WIDTH	VOLUME IN M <sup>3</sup>	LENGTH	WIDTH
0.3 M <sup>3</sup>	1.20 m	1.00 m	50.0 m <sup>3</sup>	8.80 m	5.92 m
0.5 M <sup>3</sup>	1.23 m	1.48 m	60.0 m <sup>3</sup>	10.00 m	5.92 m
1.0 M <sup>3</sup>	1.35 m	2.96 m	70.0 m <sup>3</sup>	11.40 m	5.92 m
2.0 M <sup>3</sup>	2.30 m	2.96 m	80.0 m <sup>3</sup>	8.50 m	8.88 m
3.0 M <sup>3</sup>	2.85 m	2.96 m	100.0 m <sup>3</sup>	10.00 m	8.88 m
4.0 M <sup>3</sup>	3.30 m	2.96 m	120.0 m <sup>3</sup>	11.70 m	8.88 m
5.0 M <sup>3</sup>	3.90 m	2.96 m	150.0 m <sup>3</sup>	14.30 m	8.88 m
6.0 M <sup>3</sup>	4.40 m	2.96 m	180.0 m <sup>3</sup>	12.40 m	11.84 m
8.0 M <sup>3</sup>	5.30 m	2.96 m	200.0 m <sup>3</sup>	13.60 m	11.84 m
10.0 M <sup>3</sup>	6.20 m	2.96 m	250.0 m <sup>3</sup>	19.40 m	10.36 m
15.0 M <sup>3</sup>	5.30 m	4.44 m	300.0 m <sup>3</sup>	19.70 m	11.84 m
20.0 M <sup>3</sup>	6.50 m	4.44 m	350.0 m <sup>3</sup>	20.10 m	13.32 m
25.0 M <sup>3</sup>	7.60 m	4.44 m	400.0 m <sup>3</sup>	20.40 m	14.80 m
30.0 M <sup>3</sup>	6.30 m	5.92 m	450.0 m <sup>3</sup>	20.60 m	16.28 m
45.0 M <sup>3</sup>	8.15 m	5.92 m	500.0 m <sup>3</sup>	22.70 m	16.28 m